


16/20 BE-X

BE-X SERIES BATTERY FORKLIFT TRUCKS

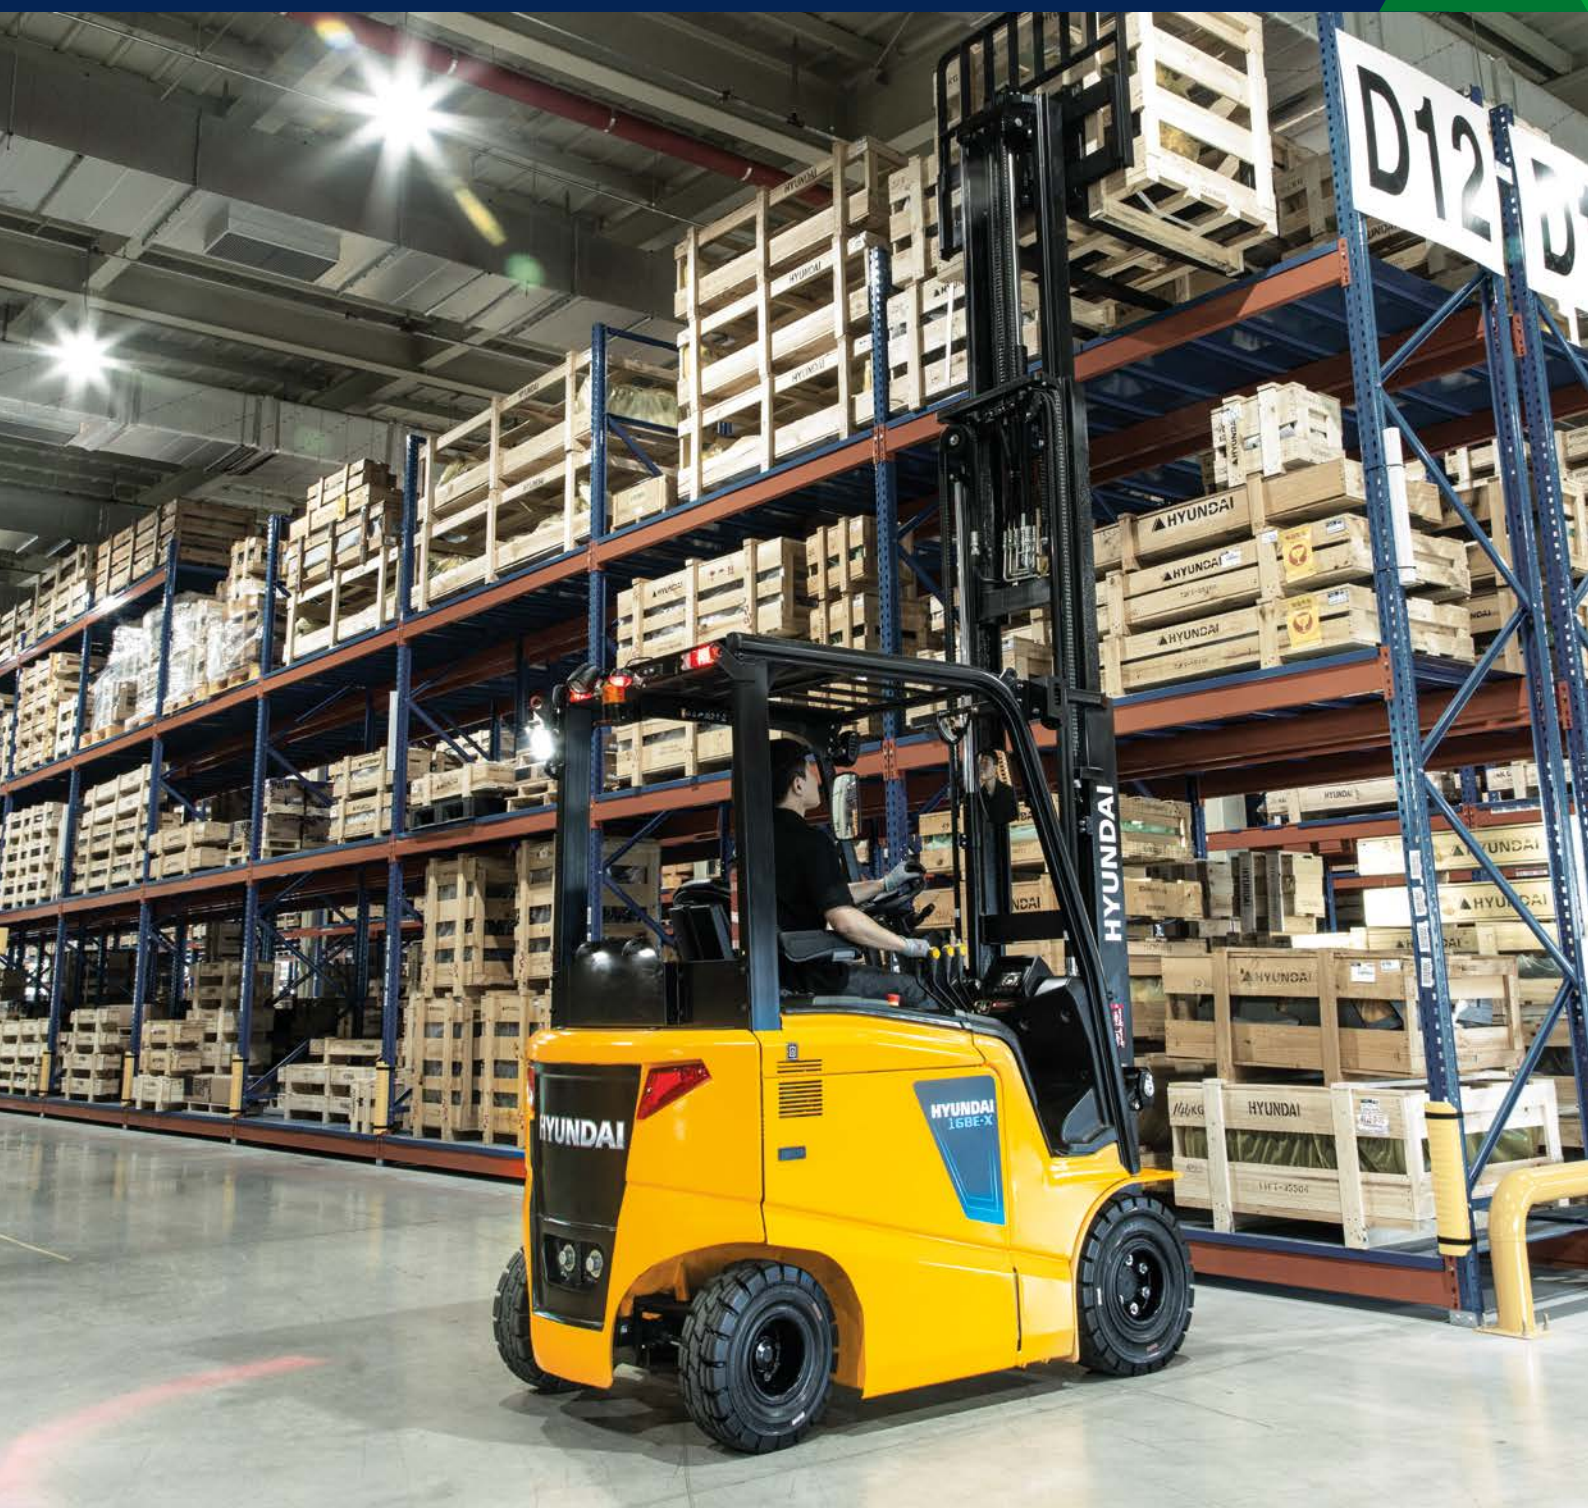

Load Capacity
1600 – 2000 kg

Drive Motor Rating
48V – 9 kW

Lift Height
3000 – 6000 mm

HIGH ON QUALITY. LOW ON COST.

The new Hyundai BE-X Series Electric Forklifts

Introducing the new BE-X battery powered electric forklifts. Ranging from 1.6 - 3.5 tonnes, the new range offers the high productivity, comfort and safety you expect from a world-class brand like Hyundai, but at a low-cost price. These budget-friendly but reliable machines are also high on efficiency and low on noise.



HIGH ON PRODUCTIVITY

Productivity has been increased through optimised vehicle performance with the use of iron phosphate Li-ion batteries and IP54 drive and pump motors for longer life and improved cost-effectiveness.

Low Energy consumption

Energy efficiency has been improved by 8.2% compared with the 9F Series thanks to the use of drive and axle assemblies with less power loss whose drive and hydraulic performances are optimised for typical working conditions.

Easier Servicing

A single-drive axle system, IP 54 motors and 48V batteries allows the machines to be used outdoors for greater convenience. Driving noise has also been reduced by 6.5dB thanks to the use of low-noise axles.

Optimised working

Operating has been made more efficient with the easy selection of driving and mast work speeds to match work conditions, with the use of up/down buttons in the cluster.

Low centre of gravity

A deep drop type frame allows the batteries to be placed between the front wheels and rear wheels to lower the body's centre of gravity, providing greater driving and lifting stability.

ZAPI Controller

For improved controller system reliability that meets EU safety regulations, a waterproof and dust-proof IP65 large-capacity ZAPI Controller is installed.



Economical Li-ion battery

OPTION

Our quick charging Li-ion batteries ensure sound performance with vastly reduced charge times. Extended hours of continuous operation are reached with the help of fast opportunity charging.



LONG
HOURS
1 CHARGE

HIGH ON COMFORT & EFFICIENCY

A comfortable operator is a productive operator. That's why we've increased the cab space and added numerous functions that allow the operator to work more efficiently and comfortably.



Redesigned cab

We've taken the space and optimised design of a sister model machine, B-X and used it for our BE-X machines for more convenient and efficient operation.

Full-suspension Grammer seat

The Grammer seat has an adjustable cushion to match the weight of the operator, a seat belt switch, a buckle switch and arm rests both on the left and right.

Hydraulic boosted-type steering wheel

The external diameter of the HPS-type steering wheel has been reduced by 20mm for extra convenience and the wheel column can be tilted 12.5 degrees forwards or backwards to suit the operator.

Easy access cab

The seat height has been increased while the first and second step have been lowered. The distance between the seat and head guard has also been increased by about 40mm, for enhanced comfort.



Multifunction digital cluster

The operator can clearly check operating information in real time on the multifunction digital cluster. Many additional functions are also embedded in the cluster for safe and convenient equipment management.



Simple MCV lever system

The frequently used MCV lever is conveniently placed to the right of the operator. This reduces movement and fatigue compared with the dashboard-fixed type.



HIGH ON SAFETY

Operator safety is and always will be a high priority for Hyundai Material Handling. The risk of accidents while working has been fundamentally eliminated using scientific vehicle body design and effective safety systems.

LED safety warning lights

Bright and long-life LED lights are fitted to the front, rear and direction indicators. A beacon lamp, blue spots and red zone lamps are optional to indicate movement for the benefit of surrounding workers.

Anti-Roll back system

This system prevents the forklift from rolling down a slope when the accelerator and brake pedal are not applied. It also offers improved ramp start-up abilities.



Front & rear cameras OPTION

The wireless camera system supplies the two-channel monitor with information to the front and rear. A front camera is installed on the lateral side of the fork, helping in the safe identification of the position of pallets during high-rack operation.



Speed limit control

A maximum travel speed can be set to meet the safety speed of the site through a multifunctional monitor. Even when maximum speed is limited, gradeability and lifting performance are maintained at top levels.

Travel speed limiter when driving with elevated load OPTION

The travel speed is limited to 3km/h when the forks are lifted to a height of 500mm or are lifted above the Free Lift height to ensure the load doesn't fall off and the forklift doesn't get overturned.

Rear grip bar & horn OPTION

The rear grip with horn button allows the driver to keep a comfortable posture during reverse driving and operate the horn quickly in case of an emergency.

OPSS system

The OPSS restricts driving when the operator leaves their seat in order to prevent accidents.



LOW ON COST OF OWNERSHIP

BE-X Series electric forklifts have been designed to reduce maintenance and costs using innovative energy saving features and reliable, durable and quick replacement parts.



Quick battery replacement

The battery can be easily removed and installed from the side of the forklift using a 1.5 tonne hand pallet truck in combination with an optional battery trolley and without the need for expensive equipment like a crane.

Convenient battery charging

When equipped with a Li-Ion battery, it can be charged by connecting a charger connector to a charging port, without the separation of battery cables connected to the frame. A safety sensor limits the operation of the equipment during the connection of the charger cables.



Hydraulic motor cooling system

For the efficient cooling of the motor compartment, there are two fans beside the left and right cover. One for blowing out hot air and one for sucking in cool air.

Safety warning

Issues relating to safety and performance, such as low brake oil level, battery discharge, and high temperature in the controller and motor will trigger the warning sound and lamp. Programming and adjustment can be performed through a Zapi Smart Console Programmer which is sold separately.



Waterproof and dustproof key switches

To increase the reliability of the electric/electronic system, an ignition key switch with a cap is used. Made by Honeywell, this prevents moisture and dust from getting in.

Sealed micro switches – MCV

Sealed micro switches are used in the hydraulic control lever system, keeping it protected from outdoor dust and water for greater reliability.



TAKE THE TOUR!



High on productivity

- Deep drop type vehicle structure-improved driving and work safety
- Achieves the best energy efficiency level in its vehicle class
- LiFePo4 Li-ion battery with excellent price-to-performance characteristics **OPTION**
- IP Class 54 driving and pump motors – expanded service area
- Application of Dual Micom ZAPI Controller
- Enhanced energy efficiency by 8.2%
- Application of power selection button for drive and pump motors

High on comfort and efficiency

- Ergonomically redesigned operator room
- A new cluster with superior visibility that can be manipulated easily
- Hood fixation-type hydraulic control lever
- Optimum step height and width for convenient getting on/off
- A/C & heater with improved cooling and heating performance **OPTION**
- Noise in the driver's seat is reduced by 6.5 dB
- Two-channel wireless front/rear cameras **OPTION**

High on productivity

- Speed limit
- Speed limiting function when traveling with elevated load **OPTION**
- Operator Presence Sensing System (OPSS)
- Antiroll back system prevents the machine from rolling back after coming to a stop on an incline
- Safety warning lamp – Blue spots and red zones **OPTION**

High on comfort and efficiency

- A battery replacement system that doesn't require a crane structure
- Battery connector specialized for charging (Li-ion)
- Controller with high reliability and self-diagnosis capability
- Sealed micro switches – MCV
- Hydraulic motor room cooling system without air vortex
- Long-lifetime LED lamps – Front/Rear work lamps and turn signals


16/20 BE-X

SPECIFICATIONS

IDENTIFICATION					
	Frontwheel type (single / double)			Single	Single
1.1	Manufacturer (abbreviation)			Hyundai	Hyundai
1.2	Manufacturer's type designation			16BE-X	20BE-X
1.3	Drive : electric (battery or mains), diesel, petrol, LPG			Electric	Electric
1.4	Operator type : hand, pedestrian, standing, seated, order-picker			Seated	Seated
1.5	Rated capacity / rated load	(Q)	kg	1600	2000
1.6	Load centre distance	(c)	mm	500	500
1.8	Load distance, centre of drive axle to fork	(x)	mm	417	417
1.9	Wheelbase	(y)	mm	1370	1370
WEIGHTS					
2.1	Service weight		kg	3323	3677
2.2	Axle loading, loaded front / rear		kg	4375 / 548	4997 / 680
2.3	Axle loading, unloaded front / rear		kg	1704 / 1619	1658 / 2019
TYRES / CHASSIS					
3.1	Tyres : superelastic, pneumatic, polyurethane			Superelastic	Superelastic
3.2	Tyre size, front		mm	21x8-9	21x8-9
3.3	Tyre size, rear		mm	18x7-8	18x7-8
3.5	Wheels, number front / rear (x = driven wheels)			2x/2	2x/2
3.6	Tread, front	(b10)	mm	980	980
3.7	Tread, rear	(b11)	mm	945	945
DIMENSIONS					
4.1	Tilt of mast / fork carriage forward / backward	(α / β)	degree	5 / 7	5 / 7
4.2	Height, mast lowered	(h1)	mm	1977	1977
4.3	Free lift	(h2)	mm	35	35
4.4	Lift height	(h3)	mm	3000	3000
4.5	Height, mast extended	(h4)	mm	4020	4020
4.7	Height of overhead guard (cabin)	(h5)	mm	2125	2125
4.8	Seat height relating to SIP / stand height	(h7)	mm	1125	1125
4.19	Overall length	(l1)	mm	3000	3020
4.20	Length to face of forks	(l2)	mm	2100	2120
4.21	Overall width	(b1)	mm	1185	1185
4.22	Fork dimensions DIN ISO 2331	(l / e / s)	mm	900 x 100 x 40	900 x 100 x 40
4.23	Fork carriage ISO 2328, class / type A, B			2 / A	2 / A
4.31	Ground clearance below mast loaded	(m1)	mm	115	115
4.32	Ground clearance centre of wheelbase	(m2)	mm	115	115
4.34.1	Aisle width for pallets 1000 x 1200 crossways (l x w)	(Ast)	mm	3505	3525
4.34.2	Aisle width for pallets 800 x 1200 crossways (w x l)	(Ast)	mm	3705	3725
4.35	Turning radius	(Wa)	mm	1890	1910
PERFORMANCE DATA					
5.1	Travel speed loaded / unloaded		km/h	14 / 15	14 / 15
5.2	Lift speed loaded / unloaded		mm/s	330 / 500	330 / 500
5.3	Lowering speed loaded / unloaded		mm/s	500 / 450	500 / 450
5.6	Max. drawbar pull loaded / unloaded		N	10388 / -	10388 / -
5.8	Max. gradeability loaded / unloaded		%	16	16
ELECTRIC MOTOR					
6.1	Drive motor rating S2 60 min		kW	9	9
6.2	Lift motor rating at S3 15%		kW	13	13
6.4	Battery voltage, nominal capacity K5		V/Ah	480 / 420	480 / 420
6.5	Battery weight		kg	707	707
6.6	Energy consumption acc. to VDI cycle		kWh/h	7.3	7.3
	Battery compartment dimensions l / w / h		mm	826 x 422 x 744	826 x 422 x 744
DRIVE MECHANISM					
8.11	Service brake			Drum brake	Drum brake
ADDITIONAL DATA					
10.1	Operating pressure system / attachments		bar	190 / 160	190 / 160
10.2	Oil volume for attachments		l/min	24	24
10.7	Sound level at the driver's ear according to DIN 12053		dB(A)	63	63

16/20 BE-X

DIMENSIONS

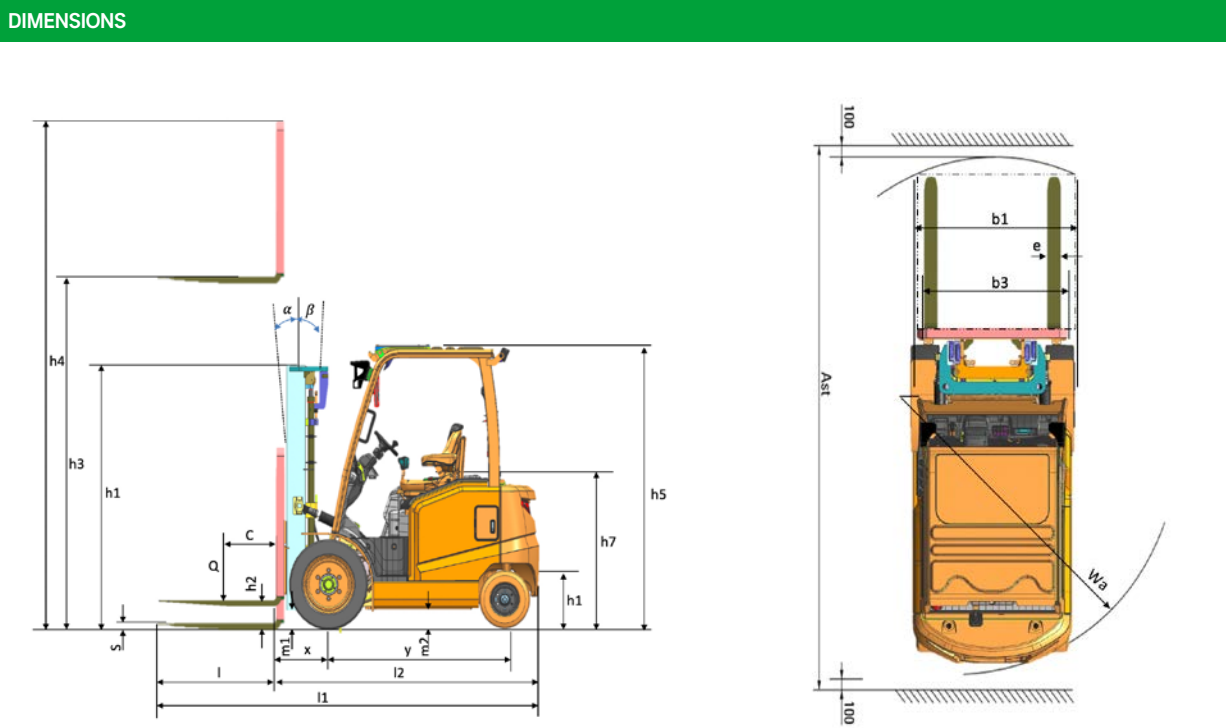

16/20 BE-X

MAST SPECIFICATION

16BE-X MAST

MAST TYPE		MAXIMUM FORK HEIGHT h3 (mm)	OVERALL HEIGHT h1 (Lowered) (mm)	FREE LIFT HEIGHT h2 (mm)			MAST TILT (deg)		LOAD CAPACITY without Sideshift (kg)	TRUCK WEIGHT (UNLOADED) (kg)	TRUCK WEIGHT (UNLOADED) (kg)
				With Load Backrest	Without Load Backrest	Without Load Backrest (3/4-SPOOL)	FWD	BWD			
2 Stage Limited Free Lift	*V300	3000	1995	35	35	35	5	7	1600	1600	3323
	V330	3300	2145	35	35	35	5	7	1600	1560	3342
	V350	3500	2245	35	35	35	5	7	1600	1530	3356
	V400	4000	2495	35	35	35	5	7	1570	1460	3393
	V450	4500	2845	35	35	35	5	5	1490	1390	3461
	V500	5000	3095	35	35	35	5	5	1430	1340	3493
3 Stage Full Free Lift	TF400	4000	1895	760	1214	1075	5	5	1540	1440	3468
	TF430	4300	1995	860	1314	1175	5	5	1500	1400	3488
	TF450	4500	2095	960	1414	1275	5	5	1470	1370	3507
	TF470	4700	2145	1010	1464	1325	5	5	1450	1350	3518
	TF500	5000	2245	1110	1564	1425	5	5	1410	1310	3538
	TF550	5500	2445	1310	1764	1780	5	5	1350	1250	3577
	TF600	6000	2645	1510	1964	1875	5	5	1280	1190	3638

V : 2 Stage wide visibility lift mast; VF: 2 Stage wide visibility full free lift mast; TF: Triplex full free lift mast

* : Standard

20BE-X MAST

MAST TYPE		MAXIMUM FORK HEIGHT h3 (mm)	OVERALL HEIGHT h1 (Lowered) (mm)	FREE LIFT HEIGHT h2 (mm)			MAST TILT (deg)		LOAD CAPACITY without Sideshift (kg)	TRUCK WEIGHT (UNLOADED) (kg)	TRUCK WEIGHT (UNLOADED) (kg)
				With Load Backrest	Without Load Backrest	Without Load Backrest (3/4-SPOOL)	FWD	BWD			
2 Stage Limited Free Lift	*V300	3000	1995	35	35	35	5	7	2000	2000	3677
	V330	3300	2145	35	35	35	5	7	2000	1950	3696
	V350	3500	2245	35	35	35	5	7	2000	1920	3710
	V400	4000	2495	35	35	35	5	7	1970	1840	3747
	V450	4500	2845	35	35	35	5	5	1880	1760	3815
	V500	5000	3095	35	35	35	5	5	1810	1690	3847
3 Stage Full Free Lift	TF400	4000	1895	760	1214	1075	5	5	1940	1810	3822
	TF430	4300	1995	860	1314	1175	5	5	1890	1770	3842
	TF450	4500	2095	960	1414	1275	5	5	1860	1740	3861
	TF470	4700	2145	1010	1464	1325	5	5	1830	1710	3872
	TF500	5000	2245	1110	1564	1425	5	5	1790	1670	3892
	TF550	5500	2445	1310	1764	1780	5	5	1720	1600	3931
	TF600	6000	2645	1510	1964	1875	5	5	1640	1530	3992


V : 2 Stage wide visibility lift mast; VF: 2 Stage wide visibility full free lift mast; TF: Triplex full free lift mast

* : Standard

16/20 BE-X

LOAD CAPACITY

16BE-X 20BE-X

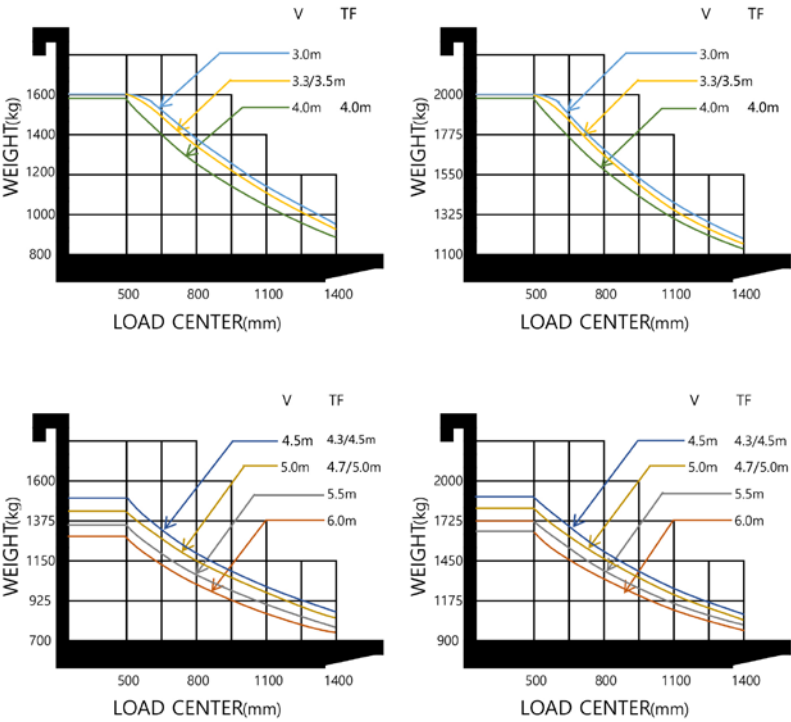

16/20 BE-X

STANDARD/OPTIONAL EQUIPMENT

DESCRIPTION			16BE-X / 20BE-X
OPERATION	OHG / CABIN	Overhead guard	●
	SEAT	Grammer, orange belt, armrest, buckle sw	●
MAST & ATTACHMENT	MAST	V-Duplex - no free lift (V300)	●
		V-Duplex - no free lift - other heights	□
		TF-Triplex - free lift - 1 central cylinder	□
		Attachment piping for 3, 4 spool	□
	FORK	Standard: 900 mm	●
		Other fork lengths: 950 mm ~1600 mm	□
	CARRIAGE / ATTACHMENT	Hook on type	●
		Side shift (hook on type)	□
		Backrest	□
HYDRAULICS	MCV	3 Spool MCV	●
		2 or 4 Spool MCV	□
	OIL	HYD oil - VG 46	●
		HYD oil - VG 32 - 68	□

DESCRIPTION			16BE-X / 20BE-X
TYRES		Pneumatic	□
		Solid	●
		Solid Non-marking	□
VISIBILITY	LAMP	Front LED	●
		Front & rear LED	□
	CAMERA	Rear camera (separate monitor)	□
		Front & rear camera (separate monitor)	□
	MIRROR	Panorama mirror & back mirror LH/RH	●
CONVENIENCE		Load sensor	□
SAFETY		Seatbelt interlock	●
		LED beacon lamp	□
		Safety lamp - red zone	□
		Safety lamp - rear blue	□
		Rear grip with horn button	□
BATTERY		Li-ion battery 51.2V / 300Ah	□
		Li-ion battery 51.2V / 300Ah Heated	□
		Lead-acid battery 48V / 420~495Ah	□
		Battery rollerbed trolley	□
CHARGER		Li-ion charger 100~200A 3ph/380V	□
		Lead-acid charger 60A 3ph/380V	□

● Standard □ Optional



Contact your Hyundai Material Handling dealer:
hyundai-mh.eu/en/dealer-locator

In Europe, Hyundai Material Handling (HD Hyundai XiteSolution) is operated and managed by:

HD Hyundai Construction Equipment Europe nv, Hyundailaan 4,
3980 Tessenderlo-Ham, Belgium

T +32 14 56 22 00 E info@hyundai.eu www.hyundai-mh.eu
VAT BE0454495082

The information and data contained in this brochure is the property of HD Hyundai XiteSolution and has been compiled with the utmost care. Specifications and designs are subject to change at any time without notice. As general data, images and descriptions have been used in the brochure, Hyundai products may be fitted with non-standard equipment. The publication of this brochure cannot be regarded as an offer or proposal to contract and is intended for European markets only.

HY-MH-00083. 04/2025. EN. ISSUE 2